

LIFTRON
MATERIAL HANDLING

DD SERIES

LITHIUM BATTERY COUNTERBALANCED

FORKLIFT



STANDARD FUNCTIONS



- High ground clearance with solid tires for excellent terrain adaptability
- 9-inch full-color display providing multiple real-time performance metrics
- Standard USB charging port to keep devices powered anytime.
- Built-in wireless phone charging for added convenience
- Optional automatic charge/discharge heating system for lithium batteries
- High-temperature protection system for safe and reliable operation
- High-efficiency permanent magnet synchronous motor with large-ratio gearbox for powerful performance
- Standard reverse assist handle and audible reverse alarm for safer maneuvering
- Modular powertrain with a clean, accessible layout for easy maintenance
- Automatic reverse lights standard, improving nighttime safety.
- Premium semi-wraparound seat for superior comfort Comfort-focused design keeps you productive all day long




LITHIUM BATTERY

DIMENSIONS

MODEL:		CPD40D	
Rated Lifting Capacity	kg	4000	
Load Center Distance	MM	500	
Frame Inclination	Front	°	6°
	Rear	°	12°
Max Lifting Speed	No Load	MM/S	390
	Full Load	MM/S	260
Maximum Travel Speeds	No Load	KM/H	14
	Full Load	KM/H	12.5
Max Gradeability (Full Load)	%	15	
Min Turning Radius	MM	2500	
Weights (With Battery)	KG	5350	
Overhang	MM	467	
Length	MM	2840	
Width	MM	1270	
Height	MM	2115	
Fork Size (LxWxT)	MM	1220x122x50	
Hydraulic System Working Pressure	MPA	18	

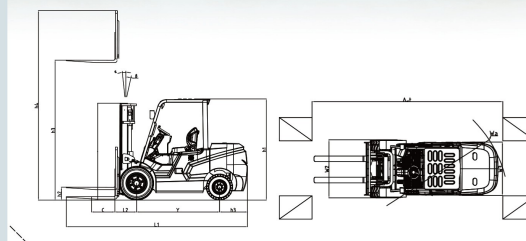

CAPACITY CHART

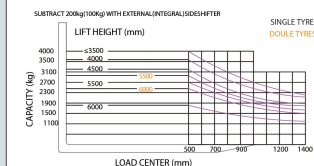

COLOR OPTION



สนใจติดต่อ :

บริษัท โปรลิฟเทค (ประเทศไทย) จำกัด
19/27 ซอย สุทธิยา 5 แขวง 60 เขตคลองเตย
กรุงเทพฯ 10110 โทร. 061-1592178 E-Mail : sales@prolifttechthailand.com



www.prolifttechthailand.com