

LIFTRON
MATERIAL HANDLING

DL SERIES

LITHIUM BATTERY COUNTERBALANCED

FORKLIFT



STANDARD FUNCTIONS





- High ground clearance with solid tires for excellent terrain adaptability
- 9-inch full-color display providing multiple real-time performance metrics
- Standard USB charging port to keep devices powered anytime.
- Built-in wireless phone charging for added convenience
- Optional automatic charge/discharge heating system for lithium batteries
- High-temperature protection system for safe and reliable operation
- High-efficiency permanent magnet synchronous motor with large-ratio gearbox for powerful performance
- Standard reverse assist handle and audible reverse alarm for safer maneuvering
- Modular powertrain with a clean, accessible layout for easy maintenance
- Automatic reverse lights standard, improving nighttime safety.
- Premium semi-wraparound seat for superior comfort Comfort-focused design keeps you productive all day long




LITHIUM BATTERY

DIMENSIONS

MODEL:		CPD30L	CPD35L	CPD38L	CPD50L
Rated Lifting Capacity	kg	3000	3500	3800	5000
Load Center Distance	MM	500	500	500	500
Frame Inclination	Front °	6°	6°	6°	6°
	Rear °	12°	12°	12°	12°
Max Lifting Speed	No Load MM/S	380	380	380	350
	Full Load MM/S	320	300	300	280
Maximum Travel Speeds	No Load KM/H	14	14	14	14
	Full Load KM/H	12.5	12.5	12.5	12.5
Max Gradeability (Full Load)	%	15	15	15	15
Min Turning Radius	MM	2500	2500	2500	3040
Weights (With Battery)	KG	4260	4650	4260	4650
Overhang	MM	467	467	467	562
Length	MM	2840	2840	2840	3290
Width	MM	1240	1240	1270	1480
Height	MM	2115	2115	2115	2249
Fork Size (L x W x T)	MM	1220x120x45	1220x125x45	1220x122x50	1220x150x50
Hydraulic System Working Pressure	MPA	18	18	18	18

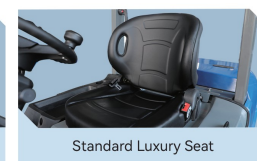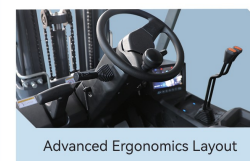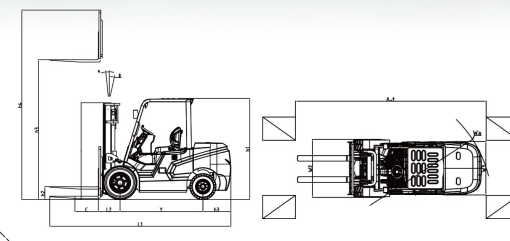

CAPACITY CHART

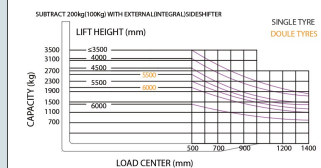

COLOR OPTION



โปรดติดต่อ :

บริษัท โปรลิฟท์เทค (ประเทศไทย) จำกัด
13/27 ซอย สุทธิสาร 5 ซอย 60 แขวงจตุจักร
เขตจตุจักร กรุงเทพมหานคร 10220
โทร. 061-1582178 E-Mail : sales@prolifttechthailand.com

www.prolifttechthailand.com

